\Rightarrow PASSCHIP



PASSCHIP®

LPR Reader

Our License Plate Reader offers automatic number plate reading combined with wiegand communication. The LPR reader transforms seamlessly integrated license plate reading into a wiegand card ID reader output. It includes all hardware and software required to integrate in standard access control systems, eliminating complex integration issues associated with alphanumeric license plates.

It can work in standalone mode or may be connected to any access control platform using the most commonly used data formats like RS232, Clock and Data or Wiegand with up to 64 bits of data. It is standard delivered with a solid TCP/IP interface for fast and continuous communication with the centralized security center in order to be online updated by system's administrator. PASSCHIP LPR is specially designed for outdoor

installation in most severe environment conditions, being the most suitable solution for installing anywhere in the world with minimum maintenance costs. It is vandal resistant.

Functions

Our License Plate Reader is an all-in-one system that embeds camera, projector and processing in a compact weatherproof housing. Management is simple using an embedded web browser interface, through the available Ethernet connection.

Accuracy of plate reading is very high due to the high resolution image sensor and advanced detection algorithm. The LPR unit allows for simple set up and easy deployment. The embedded browser based interface is supplied for initial configuration and on-going management. The module provides plate detection and notification information.


Benefits

The web browser interface also allows the integrator to configure the transmitted wiegand ID strings of the ALPR reader. Upon reading of the license plate the ALPR unit will refer to the database and transmit the corresponding wiegand ID using chosen wiegand format to the access control panel. If the wiegand ID is authorized then access is permitted.

The LPR reader is featured with an internal database that matches the license plate to a specific valid Wiegand card ID (i.e. the already existing card number of the person that drives the car). This matching can be done easily and from a remote location using the web browser interface.

Installation

Technical Specifications

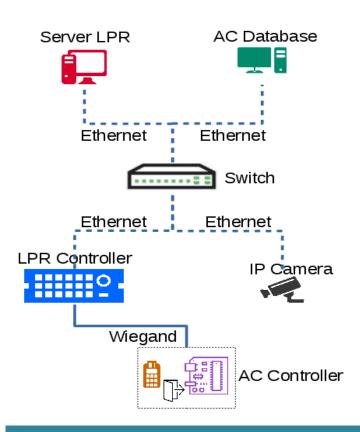

Observations

Server hardware specifications depend on the number of LPR Readers and their usage. License Plate - Card ID correspondences are provisioned directly in the server or extracted from CA Database (where possible) to avoid double provisioning.

Ordering Information

- CDLPR 100/1: LPR reader with Wiegand communication
- : Server

Ethernet 100 Base- TX/10Base-T RS232 up to 115200 Bit/sec Clock and Data Wiegand up to 64 bit Memory Internal DRAM 1 GB SD slot available 1xMMC Real time clock with back-up Li-lon maintenance free battery Camera 2MP 1080P, Optimized IR 30m, 30fps Processor ARM 64-bit, 1.2 GHz, Quad Operating System Linux OS Software Upgrade On line, during functioning Power Supply 85-264 VAC, 45-65 Hz 12 VDC Power Consumption Max. 40 W History Log capacity Internal 5MB, aprox.10 000 events with time stamp Max car Speed 200 km/h Response time Max 2 sec Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95% Size of LPR Reader 170 x 195 x 80 mm	LPR Reader	
115200 Bit/sec Clock and Data Wiegand up to 64 bit Memory Internal DRAM 1 GB SD slot available 1xMMC Real time clock with back-up Li-lon maintenance free battery Camera 2MP 1080P, Optimized IR 30m, 30fps Processor ARM 64-bit, 1.2 GHz, Quad Operating System Linux OS Software Upgrade On line, during functioning Power Supply 85-264 VAC, 45-65 Hz 12 VDC Power Consumption Max. 40 W History Log capacity Internal 5MB, aprox.10 000 events with time stamp Max car Speed 200 km/h Response time Max 2 sec Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%	Communication	Ethernet 100 Base-
Clock and Data Wiegand up to 64 bit Memory Internal DRAM 1 GB SD slot available 1xMMC Real time clock with back-up Li-lon maintenance free battery Camera 2MP 1080P, Optimized IR 30m, 30fps Processor ARM 64-bit, 1.2 GHz, Quad Operating System Linux OS Software Upgrade On line, during functioning Power Supply 85-264 VAC, 45-65 Hz 12 VDC Power Consumption History Log capacity Internal 5MB, aprox.10 000 events with time stamp Max car Speed 200 km/h Response time Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%		TX/10Base-T RS232 up to
Memory Internal DRAM 1 GB SD slot available 1xMMC Real time clock with back-up Li-lon maintenance free battery Camera 2MP 1080P, Optimized IR 30m, 30fps Processor ARM 64-bit, 1.2 GHz, Quad Operating System Linux OS Software Upgrade On line, during functioning Power Supply 85-264 VAC, 45-65 Hz 12 VDC Power Consumption Max. 40 W History Log capacity Internal 5MB, aprox.10 000 events with time stamp Max car Speed 200 km/h Response time Max 2 sec Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%		115200 Bit/sec
Memory Internal DRAM 1 GB SD slot available 1xMMC Real time clock with back-up Li-lon maintenance free battery Camera 2MP 1080P, Optimized IR 30m, 30fps Processor ARM 64-bit, 1.2 GHz, Quad Operating System Linux OS Software Upgrade On line, during functioning Power Supply 85-264 VAC, 45-65 Hz 12 VDC Power Consumption Max. 40 W History Log capacity Internal 5MB, aprox.10 000 events with time stamp Max car Speed Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%		Clock and Data
SD slot available 1xMMC Real time clock with back-up Li-lon maintenance free battery Camera 2MP 1080P, Optimized IR 30m, 30fps Processor ARM 64-bit, 1.2 GHz, Quad Operating System Linux OS Software Upgrade On line, during functioning Power Supply 85-264 VAC, 45-65 Hz 12 VDC Power Consumption Max. 40 W History Log capacity Internal 5MB, aprox.10 000 events with time stamp Max car Speed 200 km/h Response time Max 2 sec Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%		Wiegand up to 64 bit
Real time clock with back-up Li-lon maintenance free battery Camera 2MP 1080P, Optimized IR 30m, 30fps Processor ARM 64-bit, 1.2 GHz, Quad Operating System Linux OS Software Upgrade Power Supply 85-264 VAC, 45-65 Hz 12 VDC Power Consumption Max. 40 W History Log capacity Internal 5MB, aprox.10 000 events with time stamp Max car Speed Power Construction Max 2 sec Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%	Memory	Internal DRAM 1 GB
Li-lon maintenance free battery Camera 2MP 1080P, Optimized IR 30m, 30fps Processor ARM 64-bit, 1.2 GHz, Quad Operating System Linux OS Software Upgrade On line, during functioning Power Supply 85-264 VAC, 45-65 Hz 12 VDC Power Consumption Max. 40 W History Log capacity Internal 5MB, aprox.10 000 events with time stamp Max car Speed 200 km/h Response time Max 2 sec Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%		SD slot available 1xMMC
Camera 2MP 1080P, Optimized IR 30m, 30fps Processor ARM 64-bit, 1.2 GHz, Quad Operating System Linux OS Software Upgrade On line, during functioning Power Supply 85-264 VAC, 45-65 Hz 12 VDC Power Consumption Max. 40 W History Log capacity Internal 5MB, aprox.10 000 events with time stamp Max car Speed 200 km/h Response time Max 2 sec Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%		Real time clock with back-up
Camera 2MP 1080P, Optimized IR 30m, 30fps Processor ARM 64-bit, 1.2 GHz, Quad Operating System Linux OS Software Upgrade Power Supply 85-264 VAC, 45-65 Hz 12 VDC Power Consumption History Log capacity Internal 5MB, aprox.10 000 events with time stamp Max car Speed Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%		Li-Ion maintenance free
Processor ARM 64-bit, 1.2 GHz, Quad Operating System Linux OS Software Upgrade On line, during functioning Power Supply 85-264 VAC, 45-65 Hz 12 VDC Power Consumption Max. 40 W History Log capacity Internal 5MB, aprox.10 000 events with time stamp Max car Speed 200 km/h Response time Max 2 sec Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%		battery
Processor Operating System Linux OS Software Upgrade On line, during functioning Power Supply 85-264 VAC, 45-65 Hz 12 VDC Power Consumption Max. 40 W History Log capacity Internal 5MB, aprox.10 000 events with time stamp Max car Speed Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%	Camera	2MP 1080P, Optimized IR
Operating System Software Upgrade On line, during functioning Power Supply 85-264 VAC, 45-65 Hz 12 VDC Power Consumption Max. 40 W History Log capacity Internal 5MB, aprox.10 000 events with time stamp Max car Speed 200 km/h Response time Max 2 sec Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%		30m, 30fps
Software Upgrade Power Supply 85-264 VAC, 45-65 Hz 12 VDC Power Consumption Max. 40 W History Log capacity Internal 5MB, aprox.10 000 events with time stamp Max car Speed 200 km/h Response time Max 2 sec Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%		ARM 64-bit, 1.2 GHz, Quad
Power Supply 85-264 VAC, 45-65 Hz 12 VDC Power Consumption Max. 40 W History Log capacity Internal 5MB, aprox.10 000 events with time stamp Max car Speed 200 km/h Response time Max 2 sec Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%	Operating System	Linux OS
Power Consumption Max. 40 W History Log capacity Internal 5MB, aprox.10 000 events with time stamp Max car Speed 200 km/h Response time Max 2 sec Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%	Software Upgrade	On line, during functioning
Power Consumption Max. 40 W History Log capacity Internal 5MB, aprox.10 000 events with time stamp Max car Speed 200 km/h Response time Max 2 sec Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%	Power Supply	85-264 VAC, 45-65 Hz
History Log capacity Internal 5MB, aprox.10 000 events with time stamp Max car Speed 200 km/h Response time Max 2 sec Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%		12 VDC
events with time stamp Max car Speed 200 km/h Response time Max 2 sec Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%	Power Consumption	Max. 40 W
Max car Speed Response time Max 2 sec Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%	History Log capacity	Internal 5MB, aprox.10 000
Response time Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%		events with time stamp
Construction Aluminum vandal resistant painted case Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%	Max car Speed	200 km/h
Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%	Response time	Max 2 sec
Agency Approvals and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%	Construction	Aluminum vandal resistant
and Standards Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%		painted case
Ambient conditions Operating Temp:-30 C +50 C Storage Temp:-35 C +60 C Humidity: 10-95%	Agency Approvals	CE Conformity
Storage Temp:-35 C +60 C Humidity: 10-95%	and Standards	
Humidity: 10-95%	Ambient conditions	Operating Temp:-30 C +50 C
		Storage Temp:-35 C +60 C
Size of LPR Reader 170 x 195 x 80 mm		Humidity: 10-95%
	Size of LPR Reader	170 x 195 x 80 mm
(W x H x D)		
Weight 4 kg	Weight	4 kg
Protection Class IP67	Protection Class	IP67
Reading distance 3-10m	Reading distance	3-10m
Black list YES, online programmable	Black list	YES, online programmable
for maximum 1000 license		for maximum 1000 license
plates	,	plates
PTZ Digital PTZ	PTZ	Digital PTZ